

**BID SCHEDULE.**

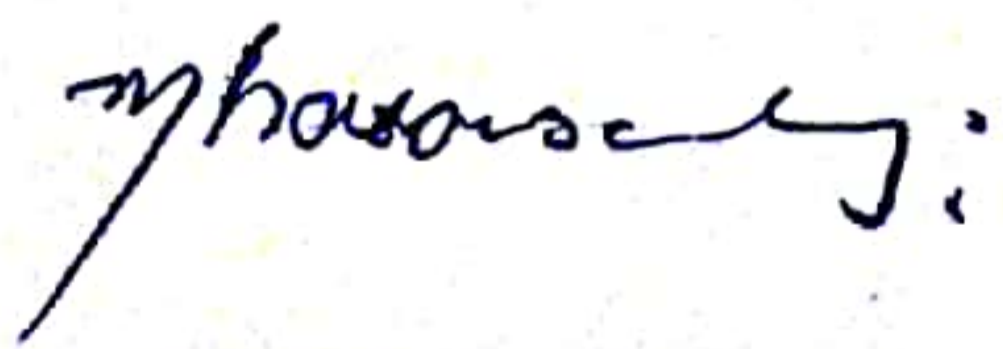
Estimated Cost:

Rs: 14,97,917/-

**Name of Work:- IMPROVEMENT/CARPETING OF LINKS ALONG GHAZALI ROAD POONCH ROAD AND  
ADJACENT ROADS IN SAMANABAD, LAHORE.**

Time Limit:

15 - DAYS.

| Sr. No. | Pay Item No.   | Description   | Quantity | Unit  | Rate to be quoted by Contractor |             |
|---------|----------------|---|----------|-------|---------------------------------|-------------|
|         |                |   |          |       | In figures                      | In words.   |
| 1.      |                | Excavation and removal of mulba i/c all lead & lifts.   | 8.265    | %0Cft |                                 |             |
| 2.      | 611-1 to 611-6 | Providing & Laying of bituminous tack coat, using 10 Lbs bitumen for 100 Sft.   | 165.30   | %Sft  |                                 |             |
| 3.      | 641-1 to 642-6 | Providing & laying 2" thick plant premixed bituminous carpet including compaction and finishing to required camber, grade and density and as per job mix formula with 4.5% bitumen contents including carriage/lead as approved by the Engineer Incharge. | 165.30   | %Sft  |                                 |             |
| 4       |                | Raising of Manholes i/c C.I. Ring.  | 8        | Each  |                                 |             |
| 5       | 16-2           | Construction of Gully Grating 1.5'x2' complete in all respect, including P/L 9" dia R.C.C pipe, connection with manhole as per drawing & design.  | 7        | Each  |                                 |             |
|         |                | Add 5% PST.   |          |       |                                 |             |
|         |                | <br>DEPUTY DIRECTOR ADS-V,<br>Lahore Development Authority,<br>LAHOR  |          |       |                                 | CONTRACTOR. |